

O D 1	TITLE LOADING DOCK WITH OVERHEAD PROTECTION AND GROUND ENCLOSURE		REVISIONS	
			NO.	DATE
			DESCRIPTION	
DATE ORIGINAL 4-23-09		SCALE NTS		
PLAN VIEW		JOB NAME		CHECKED
				DRAWN

"Taking You to the Top Since 1968"

UNITED HOIST EQUIPMENT, INC.


www.unitedhoist.com

4301 N. 40th Street**Tampa, FL 33610
P. 813-740-0535**F. 813-740-1625



**FOR ORIENTATION
PURPOSES ONLY**

OVERHEAD
PROTECTION

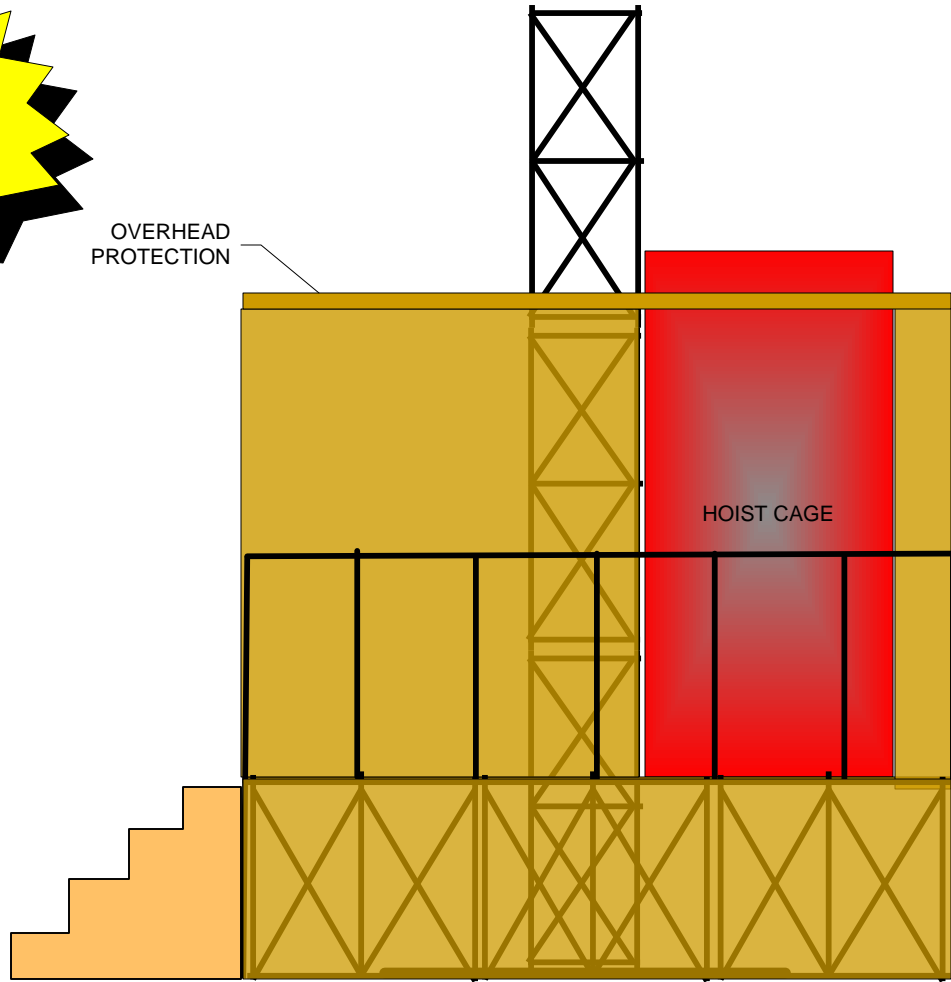

**See page (3) for
OSHA codes for
LOADING DOCK
WITH OVERHEAD
PROTECTION**

HOIST CAGE

TITLE LOADING DOCK WITH OVERHEAD PROTECTION AND GROUND ENCLOSURE		REVISIONS	
DATE ORIGINAL 4-23-09	SCALE NTS	NO.	DATE DESCRIPTION
	JOB NAME	CHECKED	DRAWN

"Taking You to the Top Since 1968"

**UNITED HOIST
EQUIPMENT, INC.**

www.unitedhoist.com

4301 N. 40th Street**Tampa, FL 33610
P. 813-740-0535**F. 813-740-1625

Material hoists, personnel hoists, and elevators. - 1926.552

1926.552(c)

Personnel hoists.

1926.552(c)(1)

Hoist towers outside the structure shall be enclosed for the full height on the side or sides used for entrance and exit to the structure. At the lowest landing, the enclosure on the sides not used for exit or entrance to the structure shall be enclosed to a height of at least 10 feet. Other sides of the tower adjacent to floors or scaffold platforms shall be enclosed to a height of 10 feet above the level of such floors or scaffolds.

1926.552(c)(2)

Towers inside of structures shall be enclosed on all four sides throughout the full height.

..1926.552(c)(3)

1926.552(c)(3)